


1

**Gwint amerykański rurowy stożkowy
NPT 1:16, ANSI B-1.20.1**


800



HSSE

DIN
~371

DIN
~374

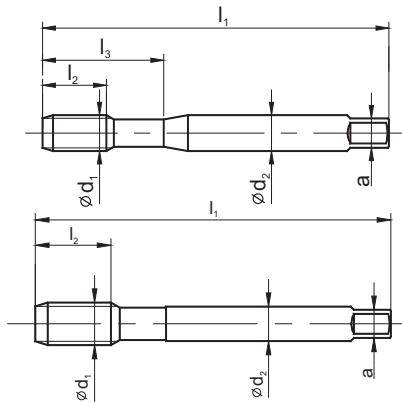

Rodzaj materiału obrabianego



Typ otworu



Rodzaj materiału

HSSE

Rodzaj powłoki

Nakrój

C / 2-3P

NPT	$\varnothing d_1$	1"/P	P	l_1	l_2	l_3	$\varnothing d_2$	a		Norma				
										~DIN-371				
										Tol.				
										INDEX	C2-121101			
1/8	-	27	0,941	90	15	35	10,0	8,0	8,50	4623	●			
1/4	-	18	1,411	100	20	37,7	14,0	11,0	11,10	4627	●			

NPT	1"/P	P	l_1	l_2	l_3	$\varnothing d_2$	a		Norma					
									~DIN-374					
										Tol.				
										INDEX	D2-121101			
3/8	18	1,411	110	22	-	14,0	11,0	14,40	4629	●				
1/2	14	1,814	140	27	-	18,0	14,5	17,80	4631	●				
3/4	14	1,814	140	28	-	20,0	16,0	23,15	4635	●				
1	11.1/2	2,209	160	35	-	25,0	20,0	29,05	4639	●				

ISO	Vc (m/min)			
P	5-20			
M	5-10			
K	5-15			
N	10-25			
S	-			