



**M ISO metric coarse threads DIN 13**

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for tapping cast iron or similar work materials.

► Geeignet zum Gewindeschneiden von Guss oder ähnlichen Werkstoffen

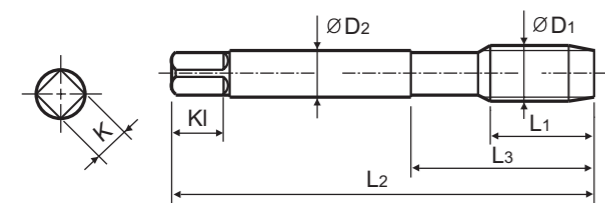

Material groups: **GG** HSS-E DIN 371/376 6HX 60° C TiCN p.B245

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK D215-228, TAPPING CHUCK D221-228, ONE STEP TAPPING CHUCK D211-213

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiCN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TI821136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TI821156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TI821196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TI821176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TI821496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TI821206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TI821226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TI821246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TI821266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TI821286	15	70	25	6	4.9	8	4	4.2
M6 × 1		TI821316	17	80	30	6	4.9	8	4	5
M7 × 1		TI821346	17	80	30	7	5.5	8	4	6
M8 × 1.25		TI821366	20	90	35	8	6.2	9	4	6.8
M9 × 1.25		TI821396	20	90	35	9	7	10	4	7.8
M10 × 1.5		TI821426	22	100	39	10	8	11	4	8.5
M11 × 1.5		TI821466	22	100	40	8	6.2	9	4	9.5
M12 × 1.75		TI821506	24	110	44	9	7	10	4	10.2
M14 × 2		TI821546	26	110	44	11	9	12	4	12
M16 × 2		TI821606	27	110	44	12	9	12	4	14
M18 × 2.5		TI821656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TI821706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TI821746	32	140	54	18	14.5	17	4	19.5
M24 × 3		TI821786	34	160	60	18	14.5	17	4	21
M27 × 3		TI821866	36	160	60	20	16	19	4	24
M30 × 3.5		TI821946	40	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					




**M ISO metric coarse threads DIN 13**

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for tapping cast iron or similar work materials.

► Geeignet zum Gewindeschneiden von Guss oder ähnlichen Werkstoffen

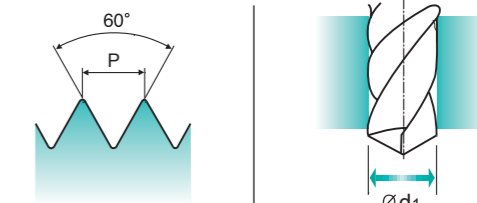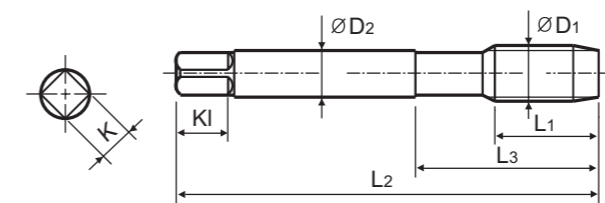

Material groups: **GG** HSS-E DIN 371/376 6HX 60° C TiAlN p.B245

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK D215-228, TAPPING CHUCK D221-228, ONE STEP TAPPING CHUCK D211-213

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiAlN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TY821136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TY821156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TY821196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TY821176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TY821496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TY821206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TY821226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TY821246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TY821266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TY821286	15	70	25	6	4.9	8	4	4.2
M6 × 1		TY821316	17	80	30	6	4.9	8	4	5
M7 × 1		TY821346	17	80	30	7	5.5	8	4	6
M8 × 1.25		TY821366	20	90	35	8	6.2	9	4	6.8
M9 × 1.25		TY821396	20	90	35	9	7	10	4	7.8
M10 × 1.5		TY821426	22	100	39	10	8	11	4	8.5
M11 × 1.5		TY821466	22	100	40	8	6.2	9	4	9.5
M12 × 1.75		TY821506	24	110	44	9	7	10	4	10.2
M14 × 2		TY821546	26	110	44	11	9	12	4	12
M16 × 2		TY821606	27	110	44	12	9	12	4	14
M18 × 2.5		TY821656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TY821706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TY821746	32	140	54	18	14.5	17	4	19.5
M24 × 3		TY821786	34	160	60	18	14.5	17	4	21
M27 × 3		TY821866	36	160	60	20	16	19	4	24
M30 × 3.5		TY821946	40	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					