


# MAS-BT - Collet Chuck ER - BT40 G6,3/15.000 rpm



## Illustration



## Drawing

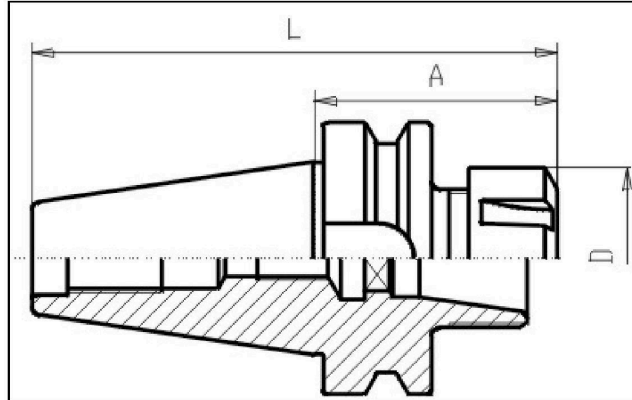

## Technical information

<b>Usage:</b>	For clamping of toolings with cylindrical shafts. Suitable for central internal coolant flow Form AD.
<b>Scope of delivery:</b>	with clamping-nut DIN 6499.
<b>Accuracy:</b>	taper to inner cone 5µm max.
<b>Customs tariff code:</b>	84 661 02 0
<b>Coolant supply:</b>	Central
<b>Balanced:</b>	G6,3 15.000 rpm / fine-balancing on grade G2,5 and/or higher rotations is possible with uplift price

## Variants

Product No.	BT	Typ ER	A	Form	L	D	Range ER	weight in kg
G410 40x16x 60	40	16	60	AD	126	32	1-10	1,2
G410 40x16x100	40	16	100	AD	166	32	1-10	1,3
G410 40x16x160	40	16	160	AD	226	32	1-10	1,4
G410 40x25x 60	40	25	60	AD	126	42	2-16	1,2
G410 40x25x100	40	25	100	AD	166	42	2-16	1,35
G410 40x25x160	40	25	160	AD	226	42	2-16	2,2
G410 40x32x 60	40	32	60	AD	126	50	3-20	1,2
G410 40x32x100	40	32	100	AD	166	50	3-20	1,5
G410 40x32x160	40	32	160	AD	226	50	3-20	2,05
G410 40x40x 80	40	40	80	AD	146	63	4-26	1,4

MAS-BT - Collet Chuck ER - BT40 G6,3/15.000 rpm

G410 40x40x120	40	40	120	AD	186	63	4-26	2,1
G410 40x40x160	40	40	160	AD	226	63	4-26	2,95