


MAS-BT - Collet Chuck ER - BT50 G6,3/15.000 rpm



Illustration



Drawing

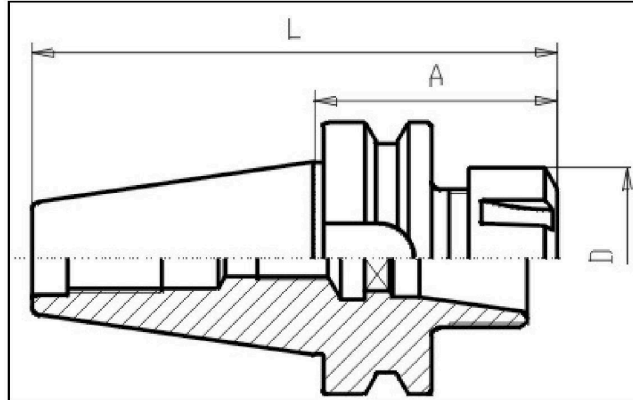

Technical information

Usage:	For clamping of toolings with zylindrical shafts. Suitable for central internal coolant flow Form AD.
Scope of delivery:	with clamping-nut DIN 6499.
Accuracy:	taper to inner cone 5µm max.
Customs tariff code:	84 661 02 0
Coolant supply:	Central
Balanced:	G6,3 15.000 rpm / fine-balancing on grade G2,5 and/or higher rotations is possible with uplift price

Variants

Product No.	BT	Typ ER	A	Form	L	D	Range ER	weight in kg
G410 50x25x 70	50	25	70	AD	172	42	2-16	--
G410 50x32x 70	50	32	70	AD	172	50	3-20	3,8
G410 50x32x100	50	32	100	AD	202	50	3-20	--
G410 50x32x160	50	32	160	AD	262	50	3-20	4,4
G410 50x40x 80	50	40	80	AD	182	63	4-26	3,5
G410 50x40x160	50	40	160	AD	262	63	4-26	4,5
G410 50x50x 80	50	50	80	AD	182	78	6-34	